




**Promat**

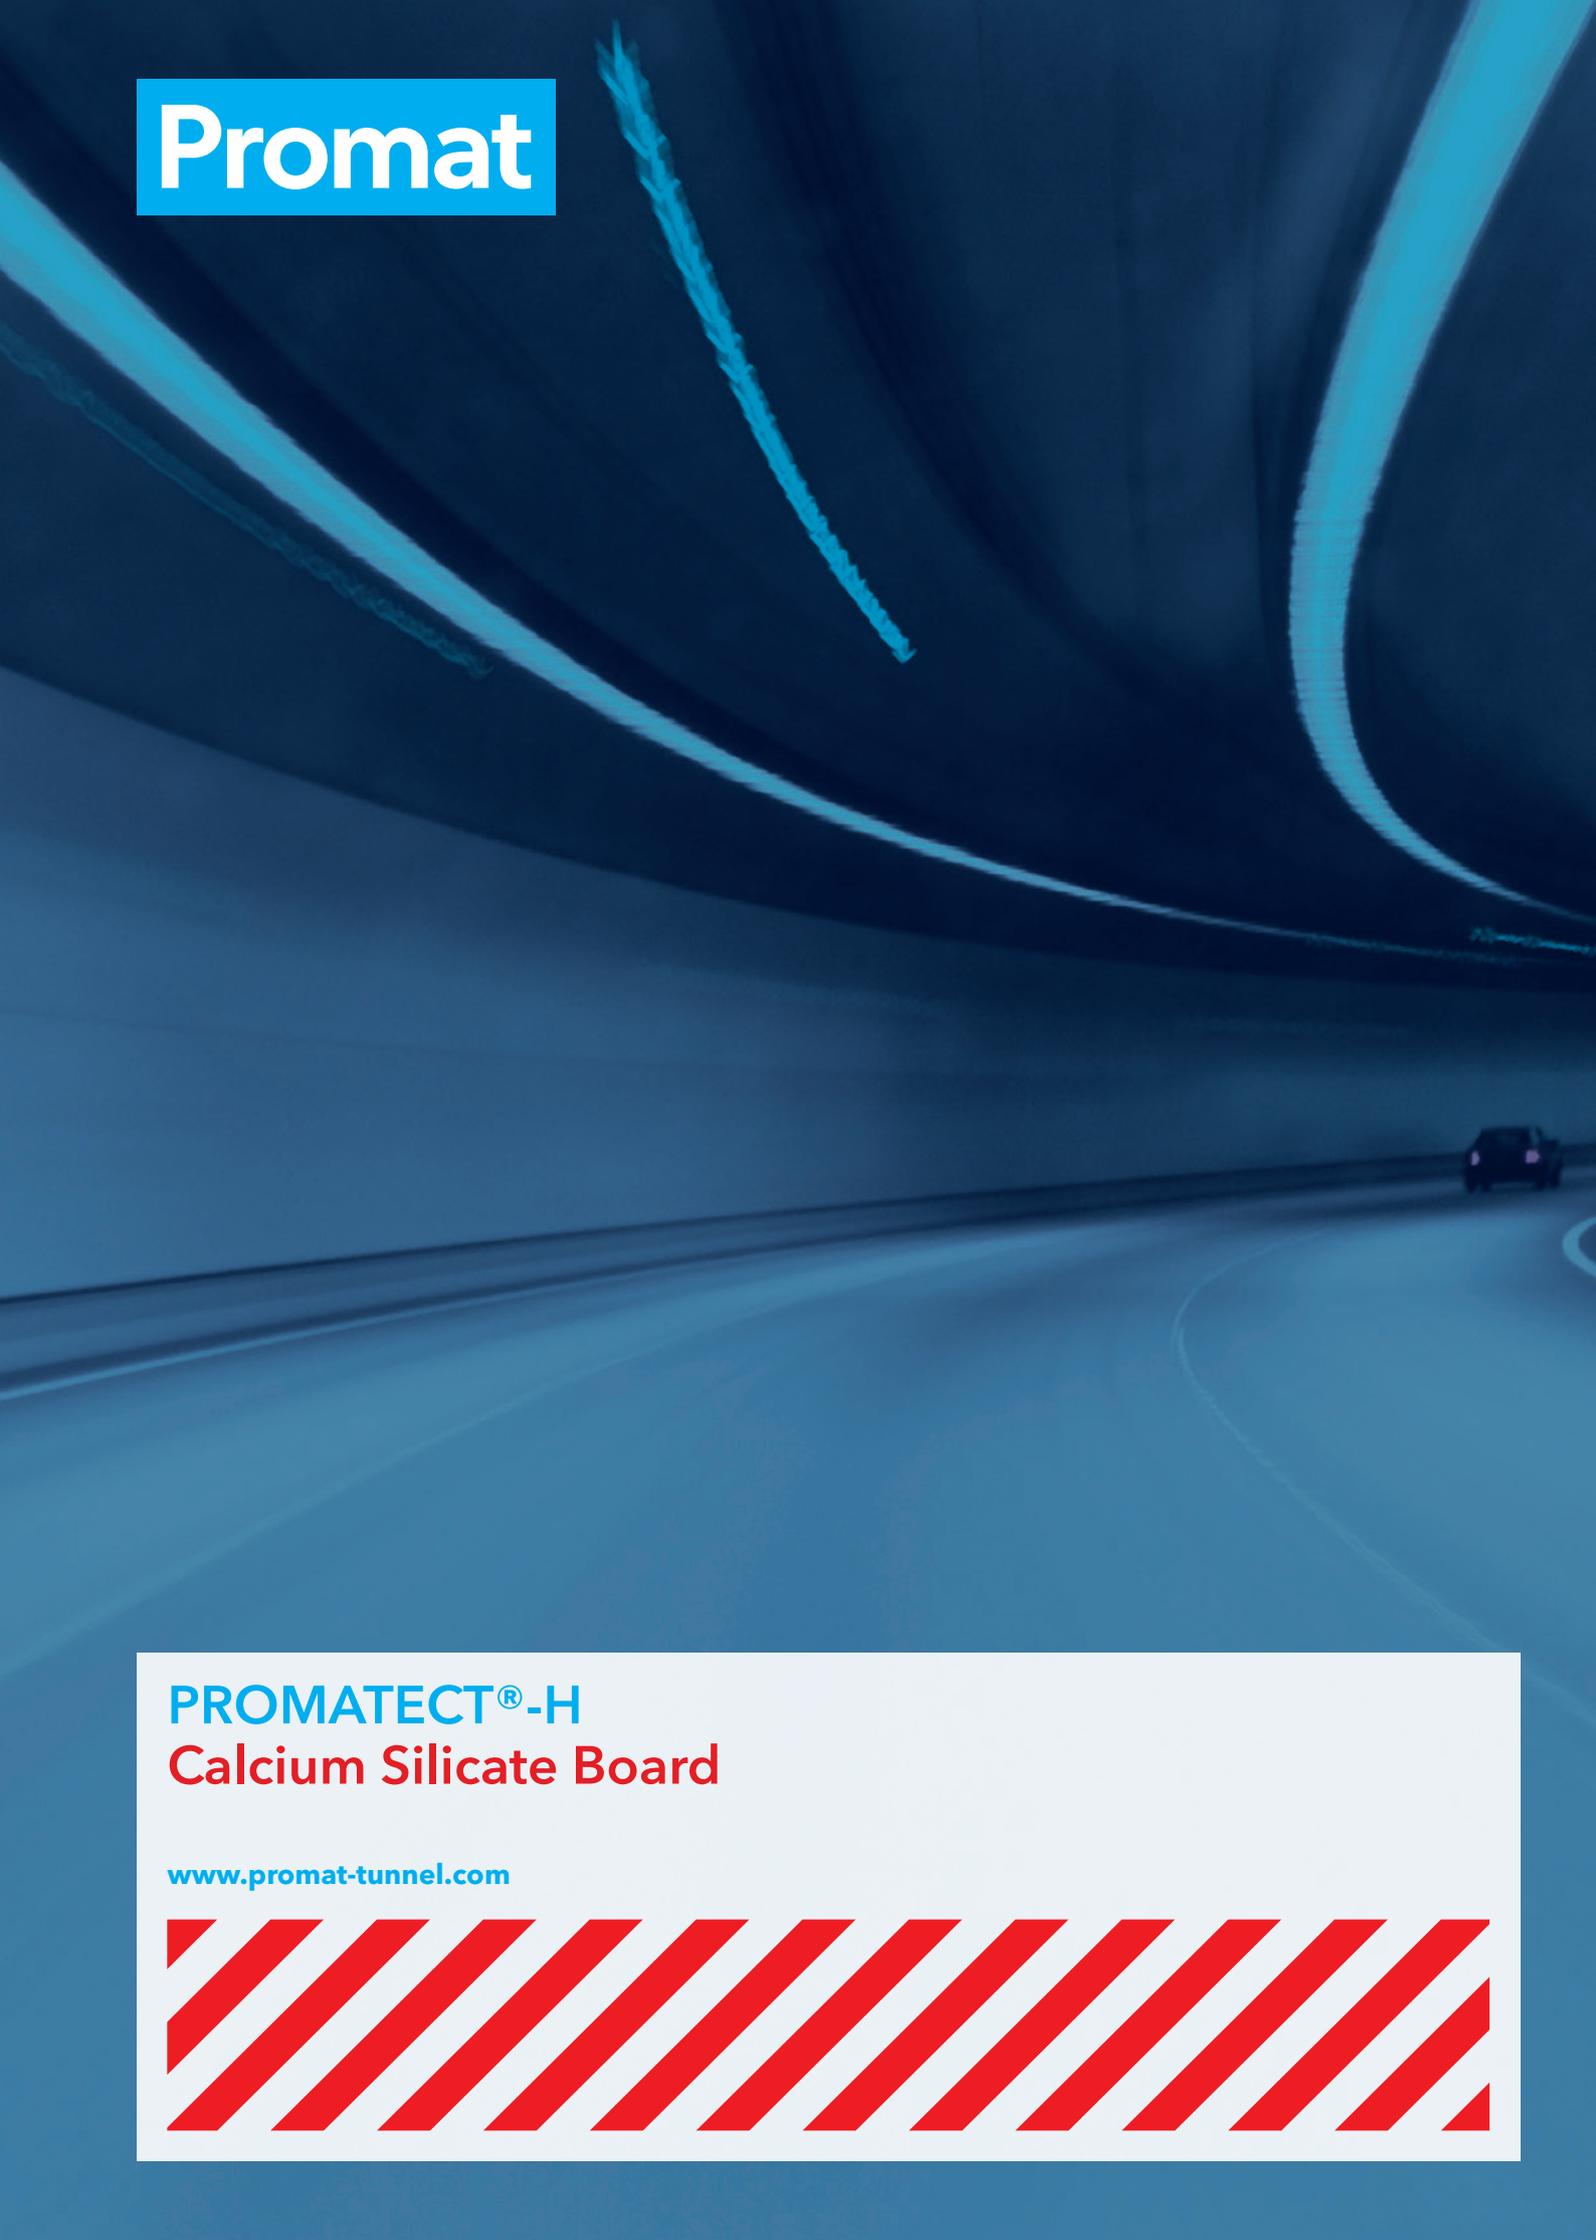

**PROMATECT®-H**  
**Calcium Silicate Board**

[www.promat-tunnel.com](http://www.promat-tunnel.com)





### Introduction

PROMATECT®-H is a non-combustible matrix engineered mineral board reinforced with selected fibres and fillers. It is formulated without the use of formaldehyde.

PROMATECT®-H is off-white in colour and has a smooth finish on one face with a sanded reverse face. The board can be left undecorated or easily finished with paints.

PROMATECT®-H is resistant to the effects of moisture and will not physically deteriorate when used in damp or humid conditions. Performance characteristics are not degraded by age or moisture.

### Advantages

- Resistant to the effects of moisture
- Not physically deteriorate when used in damp or humid conditions
- Performance characteristics are not degraded by age or moisture.

### Applications

- Tunnel lining, concrete floor and wall upgrading
- M&E services enclosure
- Access panels and hatches, fire doors
- Structural steel protection
- Membrane ceilings
- Cladding to steel ducts, self-supporting ducts

### Quality assurance

Promat products are manufactured to stringent quality control systems to assure that our customers receive materials made to the highest standards.

Operating to these standards means that all activities, which have a bearing upon quality, are set out in written procedures.

Systematic and thorough checks are made on all materials and their usage. Test equipment is subjected to regular checks and is referred back to national standards.

The information given in this data sheet is based on actual tests and is believed to be typical of the product. No guarantee of results is implied however, since conditions of use are beyond our control.

### Fire protection thickness

Fire protection thickness requirements are often specified in the owner operator's engineering codes of practice.

Alternatively, please consult Promat

### General technical properties

<b>Product generic description</b>	non-combustible, fire resisting calcium silicate board		
		DIN 4102, Part 1	
<b>Combustibility</b>	DIN 4102, Part 1 BS 476, Part 4 EN 13051-1:A1 (Classification Report WFRGent 11527C)	Non-combustible	
<b>Board format (length x width)</b>	mm	1250 x 2500	
<b>Tolerance on length and width</b>	mm	± 0.3	
<b>Board thickness</b>	mm	6, 8, 10, 12, 15, 20, 25	
<b>Tolerances on thickness</b>	mm	6 - 12 mm	± 0.5
		15 - 20 mm	± 1.0
		> 20mm	± 1.5
<b>Density (nominal, oven dry)</b>	Kg/m <sup>3</sup>	ca. 870	
<b>Alkalinity (approximate)</b>	pH	12	
<b>Thermal conductivity λ</b>	W/m <sup>2</sup> K	ca.0.175 (at 20°C)	
<b>Water absorption</b>	g/cm <sup>3</sup>	0.50	
<b>Moisture diffusion resistance</b>	μ	ca. 20	
<b>Typical moisture content (at EMC*)</b>	%	5 - 10	
<b>Surface conditions</b>	Front face: smooth, unsanded Back face: textured and or sanded Colour: beige - white		
<b>Storage</b>	Store on flat surface, in a dry area.		

All physical and mechanical values are averages based on standard production and tested according to internal procedures. The typical values are given for guidance. The figures can change dependent on the test methods used. If a particular value is of prime importance for a specification, please consult Promat Technical Department.

### Typical mechanical properties

Bending strength (longitudinal direction)	N/mm <sup>2</sup>	7.6
Tensile strength (longitudinal direction)	N/mm <sup>2</sup>	4.8
Compressive strength (perpendicular to the surface)	N/mm <sup>2</sup>	9.3
Screw pull out resistance: screw into board surface - 15mm deep	quick fix screw - 3.9 x 55	624N
	quick fix screw - 4.0 x 40	584N
	quick fix screw - 4.5 x 50	581N
	timber screw - 3.9 x 55	550N
	screw inserts (Rampa)	350N
Bolt pull through resistance (board thickness = 25mm)	Bolt M8, washer diameter 30mm	3.220N

### Formats & weights

Thickness (mm)	Dry weight (Kg/m <sup>2</sup> )	Weight (Kg/m <sup>2</sup> ) at 20°C, 65% RH
6	ca. 5.4	ca. 5.7
8	ca. 7.2	ca. 7.6
10	ca. 9.0	ca. 9.5
12	ca. 10.8	ca. 11.5
15	ca. 13.1	ca. 13.9
20	ca. 17.4	ca. 18.5
25	ca. 21.8	ca. 23.1

\* Project specific thickness can be manufactured in 1mm increments. Please contact Promat for further information

\* EMC: Equilibrium moisture content.

### Processing & machining

When machining the product with power tools, do not breathe dust and respect the regulatory occupational exposure limits for total inhalable and respirable dust. Wear safety goggles. Avoid contact with skin and eyes. Use dust extraction. In case of insufficient ventilation, wear suitable respiratory equipment to avoid health effects.

### Waste disposal

Refer to local legislation

If not available: The board is not classified as a dangerous substance and no special provisions are required regarding the carriage and disposal of the product to landfill. They can be placed in an on-site skip with other general building waste.

## Head Office

### Promat International N.V.

Bormstraat 24  
2830 Tiselt  
Belgium  
Tel: +32 15 718 100  
Fax: +32 15 718 109  
Email: info@promat-international.com  
www.promat-international.com  
www.promat-tunnel.com  
www.promat-marine.com  
www.promat-oilandgas.com

## Asia Pacific Headquarters, Malaysia

### Promat International (Asia Pacific) Ltd.

Unit 19-02-01 -Level 2 PNB Damansara  
No.19 Lorong Dungun - Damansara Heights  
50490 Kuala Lumpur  
Tel: +60 3 2095 5111  
Fax: +60 3 2095 6111  
Email: info@promat-ap.com  
www.promat-ap.com

## Australia

### Promat Australia Pty. Ltd.

1 Scotland Road  
SA 5031 Mile End South  
Tel: 1800 Promat (776 628)  
Fax: +61 8 8352 1014  
Email: mail@promat.com.au  
www.promat-ap.com

## Austria

### Promat GmbH

St.-Peter-Straße 25  
4021 Linz  
Tel: +43 732 - 6912 - 0  
Fax: +43 732 - 6912 - 3740  
Email: office@promat.at  
www.promat.at

## Belgium

### Promat Belgium

Bormstraat 24  
2830 Tiselt  
Tel: +32 15 719 351  
Fax: +32 15 718 229  
Email: info@promat.be  
Email: techniek@promat.be  
www.promat.be

## China

### Promat China Ltd.

Room 506, Block A, Qi Lin Plaza  
13-35 Pan Fu Road  
510180 Guangzhou  
Tel: +86 20 8136 1167  
Fax: +86 20 8136 1372  
Email: info@promat.com.cn  
www.promat.com.cn

## Czech Republic

### Promat s.r.o.

Čkalova 22/784  
16000 Praha 6 - Bubeneč  
Tel: +420 2 2439 0811  
Fax: +420 2 3333 3576  
Email: promat@promatpraha.cz  
www.promatpraha.cz

## Denmark

### Promat Nordic

Kometvej 36  
6230 Rødskro  
Tel: +45 7366 1999  
Fax: +45 7466 1020  
Email: info@promat.nu  
www.promat.nu

## France

### Promat

BP 66 Rue de L'Amandier  
78540 Vernouillet  
Tel: +33 1 3979 6160  
Fax: +33 1 3971 1660  
Email: info@promat.fr  
www.promat.fr

## Germany

### Promat GmbH

Scheifenkamp 16  
40878 Ratingen  
Tel: +49 2102 493 0  
Fax: +49 2102 493 111  
Email: mail@promat.de  
www.promat.de

## Hong Kong

### Promat International (Asia Pacific) Ltd.

Room 1010, C.C. Wu Building  
302-308 Hennessy Road, Wanchai  
Tel: +852 2836 3692  
Fax: +852 2834 4313  
Email: apromath@promat.com.hk  
www.promat.com.hk

## India

### Promat (Malaysia) Sdn. Bhd. (India Representative Office)

610-611, Ansal Imperial Tower  
C-Block, Community Centre  
Naraina Vihar, Naraina  
110028 New Delhi  
Tel: +91 11 2577 8413  
Fax: +91 11 2577 8414  
Email: info-india@promat-asia.com  
www.promat-ap.com

## Italy

### Promat S.p.A.

Via Perlasca 14  
27010 Vellezzo Bellini (PV)  
Tel: +39 0382 4575 200  
Fax: +39 0382 926 900  
Email: info@promat.it  
www.promat.it

## Japan

### Promat Japan Corporation

Pacific Marks Shinjuku 4-15-7  
Nishi-Shinjuku, Shinjuku-Ku  
160-0023 Tokyo

## Malaysia

### Promat (Malaysia) Sdn. Bhd.

Unit 19-02-01 - Level 2 PNB Damansara  
No.19 Lorong Dungun  
Damansara Heights  
50490 Kuala Lumpur  
Tel: +60 3 2095 8555  
Fax: +60 3 2095 2111  
Email: info@promat-ap.com  
www.promat-ap.com

## Netherlands

### Promat B.V.

Vleugelboot 22  
3991 CL Houten  
PO Box 475  
3990 GG Houten  
Tel: +31 30 241 0770  
Fax: +31 30 241 0771  
Email: info@promat.nl  
www.promat.nl

## Poland

### Promat TOP Sp. z o. o.

ul. Przeclawska 8  
03 879 Warszawa  
Tel: +48 22 212 2280  
Fax: +48 22 212 2290  
Email: top@promatop.pl  
www.promatop.pl

## Russia

### Promat

Pr. Vernadskogo 84/2  
119606, Russia  
Tel: +7 (495) 246 01 01  
Fax: +7(495) 246 01 92  
Email: sales@promat.ru  
www.promat.ru

## Singapore

### Promat Building System Pte. Ltd.

10 Science Park Road  
#03-14 The Alpha - Singapore Science Park II  
117684 Singapore  
Tel: +65 6776 7635  
Fax: +65 6776 7624  
Email: info@promat.com.sg  
www.promat-ap.com

## South East Europe Headquarters, Slovenia

### Promat d.o.o.

Kidričeva 56b  
4220 Škofja Loka, Slovenia  
Tel: +386 4 51 51 451  
Fax: +386 4 51 51 450  
Email: info@promat-see.com  
www.promat-see.com

## South Korea

### Promat International (Asia Pacific) Ltd.

(Korea Branch Office)  
Room 406, 811-2 - Yeoksam-dong  
Gangnam-gu  
135080 Seoul  
Tel: +82 70 7794 8216  
Email: apromath@promat.com.hk  
www.promat-ap.com

## Spain

### Promat Ibérica S.A.

C/Velazquez, 47 - 6° izda  
28001 Madrid  
Tel: +34 91 781 1550  
Fax: +34 91 575 1597  
Email: info@promat.es  
www.promat.es

## Switzerland

### Promat AG

Stationsstrasse 1  
8545 Rickenbach-Sulz  
Tel: +41 52 320 9400  
Fax: +41 52 320 9402  
Email: office@promat.ch  
www.promat.ch

## United Arab Emirates

### Promat Fire Protection LLC

Plot no. 597-921,  
Dubai Investment Park 2  
PO Box 123945, Dubai  
Tel: +971 4 8850 3070  
Fax: +971 4 8853 588  
www.promatfp.ae

## United Kingdom

### Promat UK Ltd.

The Sterling Centre, Eastern Road,  
Bracknell  
RG12 2TD Berkshire, Great Britain  
Tel: +44 1344 381 300/400  
Fax: +44 1344 381 301  
Email: marketinguk@promat.co.uk  
www.promat.co.uk

## USA

### Promat Inc.

1731 Fred Lawson Drive  
TN 37801 Maryville  
Tel: +1 865 681 0155  
Fax: +1 865 681 0016  
Email: sales@promat.us  
www.promat.us