


ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

PROMATECT® TF-X

Eternit N.V.

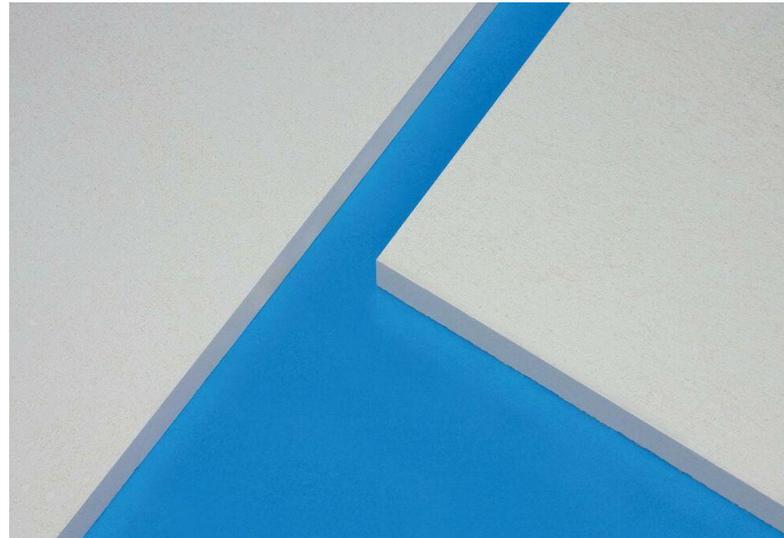

EPD HUB, HUB- 3651

Publishing date 18 July 2025, last updated on 18 July 2025, valid until 17 July 2030.

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Eternit N.V.
Address	Kuiermansstraat 1; 1880 Kapelle-op-den-Bos; Belgium
Contact details	info@etexgroup.com
Website	https://www.promat.com

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR Version 1.1, 5 Dec 2023
Sector	Construction product
Category of EPD	Third party verified EPD
Parent EPD number	-
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Els De Mulder, Etex N.V.
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

Product name	PROMATECT® TF-X
Place of production	Kuiermansstraat 1; 1880 Kapelle-op-den-Bos; Belgium
Period for data	Calendar year 2023
Averaging in EPD	No averaging

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 m ² of PROMATECT® TF-X with a thickness of 30 mm
Declared unit mass	29.9 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	22.2
GWP-total, A1-A3 (kgCO ₂ e)	18.6
Secondary material, inputs (%)	7.1
Secondary material, outputs (%) landfill scenario	0
Secondary material, outputs (%) recycling scenario	100
Total energy use, A1-A3 (kWh)	65
Net freshwater use, A1-A3 (m ³)	0.27

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

The manufacturer is a producer of various fire protection calcium silicate boards being non-combustible matrix engineered mineral boards reinforced with selected fibres and fillers.

The manufacturer has an environment, health and safety management system which is ISO 14001 and ISO 45001 certified. The quality management system of the company and the production facility are certified according to ISO 9001.

The manufacturer is part of the global Etex Group of Companies, which operates across Europe, Africa, Near & Middle East and South America. The Etex group operates more than 160 sites in 45 countries and employs over 13500 people worldwide.

PRODUCT DESCRIPTION

PROMATECT® TF-X is fire protective calcium silicate board, composed of a calcium silicate matrix, cement and mineral fillers. The board is off-white in colour. The board is produced using FiBeCop technology, a new and exclusive manufacturing process that allows production of monolithic homogenous Calcium Silicate boards with thickness up to 40mm. The finishing step includes cutting and grinding to the correct dimensions. The grinding, cutting and production waste can be internally recycled.

FiBeCop produced boards can guarantee stable performance under the most extreme conditions and in most cases only require single layer installation where previously double layers would have been applicable. The board is resistant to moisture, of stable dimensions and large format. It is produced with quality assurance according to the standard ISO 9001.

Within Etex, there is the commitment to reduce the use of virgin and non-renewable materials by optimizing our current processes related to waste management and developing responsible sourcing, through innovation and partnerships.

For the reference year 2023, PROMATECT®-TF-X contains 8.9 % circular content:

- 3.7 % renewable material content

Further information can be found in the Recycled Content & Circular Content Declaration for PROMATECT® TF-X available upon request.

This EPD is representative for all PROMATECT® TF-X produced by Etex in Belgium and presents the environmental impacts for the production of 1m² of PROMATECT® TF-X with a thickness of 30 mm, a reference service life of 60 years and its related impacts over the cradle to grave life-cycle modules.

The environmental impacts of the product with other thicknesses can be considered as proportional to the thickness of the product. Accordingly, for any actual board thickness, the environmental impacts for the actual board thickness can be easily obtained by multiplying the results in this EPD by the ratio (actual thickness (mm) / 30 mm).

Further information can be found at <https://www.promat.com>.

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass %	Material origin
Metals	0	-
Minerals	96	Europe, World
Fossil materials	0.3	Europe
Bio-based materials	3.7	Europe, World

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0.59
Biogenic carbon content in packaging, kg C	0.38

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 m ² of PROMATECT® TF-X with a thickness of 30 mm
Mass per declared unit	29.9 kg
Functional unit	1 m ² of PROMATECT® TF-X with a thickness of 30 mm, a reference service life of 60 years and its related impacts over the cradle to grave life-cycle modules
Reference service life	60 years

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries			
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D			
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction/ demolition	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling	

Modules not declared = MND. Modules not relevant = MNR

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

Transport for raw materials considers the distance from the manufacturing location of the raw material to the production plant and the modelling of the relevant transportation type (e.g. e.g. bulk sea fret, road lorry, train, ...) for each raw material.

Regarding the energy used, natural gas, steam and electricity are consumed during manufacturing. The electricity used in the manufacturing plant is 100% sourced from the renewable sources.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

For the transportation from the production plant to the building site (A4), a scenario is assumed with a transportation distance of 100 km and using a lorry as transportation method.

For other transportation distances with lorry the impacts can be easily calculated by multiplying the impacts in module A4 with the lorry transport distance to the specific location and dividing by 100.

Installation (A5) of the product can be done in various ways, depending on the application and the bearing structure.

In this EPD stainless steel anchor and rings are assumed and energy of installation is assumed to be 0.013/m². Note that the substructure is not included in the scope of the EPD.

During the installation, some losses may occur. For this study, an average loss rate of 3% is used (scenario considered for the calcium silicate losses: landfill, truck transport 50 km). All packaging material for PROMATECT® TF-X is transported to EoL according to the following scenarios: landfill 50 km; recycling 100 km. Also waste treatment of the packaging materials is included assuming 90% re-use/10% recycling for the wooden pallet, 100% recycling for the cardboard and 50% landfill/50% recycling for the plastic strap.

PRODUCT USE AND MAINTENANCE (B1-B7)

The product has an estimated reference service life of 60 years, providing the product is installed as per Promat recommendations. In such case, the product will last during its life of use generally without any requirements for maintenance, repair, replacement, or refurbishment, providing normal and no accidental conditions of usage are encountered. The product will also not need any operational energy nor operational water to fulfil its duty, once installed in the building.

The only impact during the use phase is that of carbonation, where some CO₂ is adsorbed from the atmosphere over the lifetime of the PROMATECT® TF-X. Depending on the application, the degree of carbonation will vary. The carbonation is calculated for the use scenario “outdoor, sheltered from rain” and reported in the B1 module.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

Two possible end-of-life scenarios are considered for the PROMATECT® TF-X:

Scenario 1: 100% landfilling scenario: 100% of PROMATECT® TF-X (+ anchors and rings) from demolition wastes are going to landfill at end of life (C4).

Scenario 2: 100% recycling scenario: 100% of PROMATECT® TF-X (+ anchors and rings) from demolition wastes are going to recycling at end of life (C3).

For the dismantling of the PROMATECT® TF-X in C1, manual dismantling is considered and no energy consumption is assumed.

The transport of the waste to the end-of-life (C2) is considered to be 50 km from the plant in the landfilling scenarios and 100 km from the plant in the recycling scenario.

Outside the system boundaries, module D shows benefits and loads, energy transfer and biogenic carbon transfers from the recycling processes


In scenario 1 these are related to the 100% recycling of the packaging materials (wooden pallet, strap and cardboard).

In scenario 2 these are related to the 100% recycling of the PROMATECT® TF-X, the packaging materials and the anchors and rings.

MANUFACTURING PROCESS

DESCRIPTION

The PROMATECT® TF-X boards are composed of a calcium silicate matrix, cement and mineral fillers. They are manufactured in a process where the raw materials are first mixed together with water to form a slurry. The board is produced using FiBeCop technology, a new and exclusive manufacturing process that allows production of monolithic homogenous Calcium Silicate boards with thickness up to 40mm. The board is dried before finishing. All material which is cut off or sanded away is recycled within the factory.

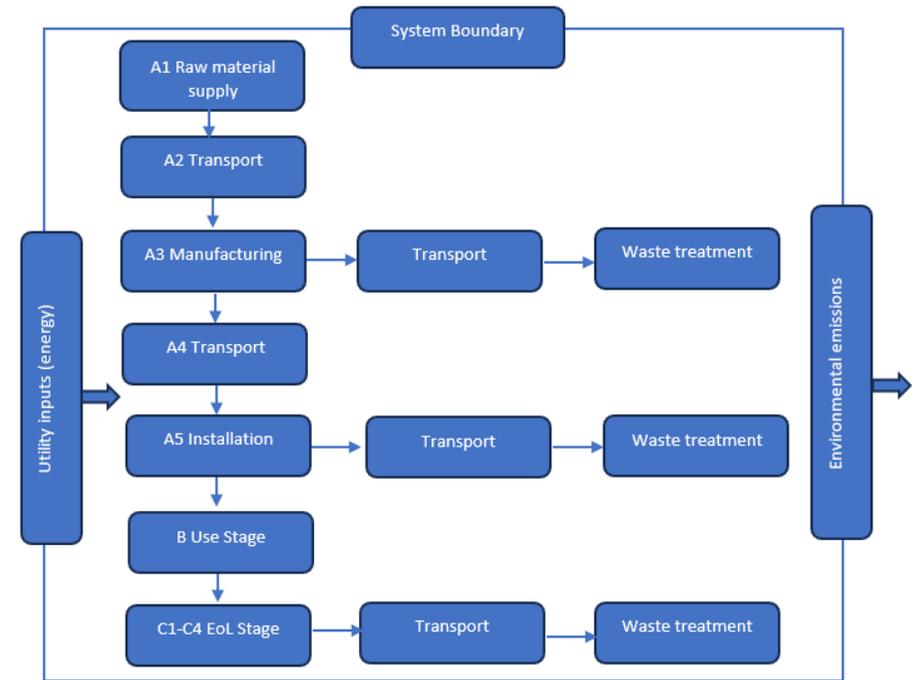

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging material	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	NA

This EPD is product and factory specific and does not contain average calculations.

The PROMATECT® TF-X exists in various thicknesses for which the environmental impacts can be considered as proportional to the thickness of the product. Accordingly, for any actual board thickness, the environmental impacts for the actual board thickness can be calculated by multiplying the results in this EPD by the ratio (actual thickness (mm) / 30 mm).

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. The EPD Generator uses Ecoinvent v3.10.1 and One Click LCA databases as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, Cut-off, EN 15804+A2'.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
GWP – total ¹⁾	kg CO ₂ e	1,86E+01	5,85E-01	2,72E+00	-3,19E+00	0,00E+00	2,85E-01	5,70E-01	0,00E+00	3,11E+00	2,37E+00	0,00E+00	-1,40E+00	-3,15E+00						
GWP – fossil	kg CO ₂ e	2,22E+01	5,85E-01	1,30E+00	-3,19E+00	0,00E+00	2,85E-01	5,70E-01	0,00E+00	9,30E-01	1,87E-01	0,00E+00	5,14E-02	-1,36E-02						
GWP – biogenic	kg CO ₂ e	-3,57E+00	1,17E-04	1,41E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,73E-05	1,15E-04	0,00E+00	2,18E+00	2,18E+00	0,00E+00	-1,45E+00	-3,13E+00
GWP – LULUC	kg CO ₂ e	5,56E-02	2,10E-04	1,99E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,02E-04	2,05E-04	0,00E+00	5,56E-04	1,07E-04	0,00E+00	4,54E-04	5,07E-04
Ozone depletion pot.	kg CFC ₋₁₁ e	5,18E-07	1,16E-08	1,68E-08	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,67E-09	1,13E-08	0,00E+00	5,20E-09	5,43E-09	0,00E+00	-2,52E-08	-2,56E-08
Acidification potential	mol H ⁺ e	1,37E-01	1,22E-03	8,45E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,93E-04	1,19E-03	0,00E+00	5,11E-03	1,33E-03	0,00E+00	2,72E-04	-1,25E-03
EP-freshwater ²⁾	kg Pe	1,79E-03	3,94E-05	6,74E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,92E-05	3,84E-05	0,00E+00	4,25E-04	1,54E-05	0,00E+00	1,09E-05	1,28E-05
EP-marine	kg Ne	3,51E-02	2,92E-04	1,52E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,42E-04	2,85E-04	0,00E+00	9,65E-04	5,07E-04	0,00E+00	4,84E-05	-4,97E-04
EP-terrestrial	mol Ne	3,88E-01	3,15E-03	1,67E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,54E-03	3,07E-03	0,00E+00	1,05E-02	5,53E-03	0,00E+00	4,86E-04	-7,28E-03
POCP (“smog”) ³⁾	kg NMVOCe	1,13E-01	2,02E-03	4,91E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,87E-04	1,97E-03	0,00E+00	3,95E-03	1,98E-03	0,00E+00	1,42E-04	-1,56E-03
ADP-minerals & metals ⁴⁾	kg Sbe	3,02E-05	1,95E-06	2,45E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,49E-07	1,90E-06	0,00E+00	1,86E-05	2,98E-07	0,00E+00	1,10E-07	-4,09E-07
ADP-fossil resources	MJ	2,22E+02	8,22E+00	1,51E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,01E+00	8,02E+00	0,00E+00	9,93E+00	4,60E+00	0,00E+00	5,57E-01	4,42E-02
Water use ⁵⁾	m ³ e depr.	1,26E+01	4,09E-02	4,94E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,99E-02	3,99E-02	0,00E+00	2,26E-01	1,33E-02	0,00E+00	4,83E-02	3,73E-02

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
Particulate matter	Incidence	6,77E-07	4,31E-08	2,47E-08	0,00E+00	2,10E-08	4,20E-08	0,00E+00	7,94E-08	3,03E-08	0,00E+00	2,93E-09	-1,83E-08							
Ionizing radiation ⁶⁾	kBq U235e	5,18E-01	1,06E-02	2,29E-02	0,00E+00	5,17E-03	1,03E-02	0,00E+00	4,63E-02	2,89E-03	0,00E+00	3,68E-03	1,97E-02							
Ecotoxicity (freshwater)	CTUe	2,79E+01	1,09E+00	9,75E-01	0,00E+00	5,33E-01	1,07E+00	0,00E+00	4,50E+00	3,86E-01	0,00E+00	1,69E-01	-5,65E-01							
Human toxicity, cancer	CTUh	3,65E-09	9,81E-11	1,21E-10	0,00E+00	4,78E-11	9,57E-11	0,00E+00	1,80E-09	3,46E-11	0,00E+00	1,81E-11	2,83E-10							
Human tox. non-cancer	CTUh	1,27E-07	5,20E-09	4,37E-09	0,00E+00	2,54E-09	5,07E-09	0,00E+00	1,95E-08	7,94E-10	0,00E+00	4,86E-10	6,63E-10							
SQP ⁷⁾	-	3,45E+02	4,97E+00	1,11E+01	0,00E+00	2,42E+00	4,85E+00	0,00E+00	4,48E+02	9,06E+00	0,00E+00	2,04E-01	-1,39E-01							

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
Renew. PER as energy ⁸⁾	MJ	8,34E+01	1,44E-01	3,95E+00	0,00E+00	7,02E-02	1,40E-01	0,00E+00	8,77E-01	4,44E-02	0,00E+00	1,05E-01	1,91E-01							
Renew. PER as material	MJ	3,01E+01	0,00E+00	-1,23E+01	0,00E+00	-1,77E+01	-1,77E+01	0,00E+00	1,27E+01	1,27E+01										
Total use of renew. PER	MJ	1,13E+02	1,44E-01	-8,37E+00	0,00E+00	7,02E-02	1,40E-01	0,00E+00	-1,69E+01	-1,77E+01	0,00E+00	1,28E+01	1,29E+01							
Non-re. PER as energy	MJ	1,27E+02	8,22E+00	1,21E+01	0,00E+00	4,01E+00	8,02E+00	0,00E+00	9,93E+00	4,60E+00	0,00E+00	5,43E-01	2,99E-02							
Non-re. PER as material	MJ	8,67E-01	0,00E+00	-8,67E-01	0,00E+00	0,00E+00	0,00E+00	8,41E-01	8,41E-01											
Total use of non-re. PER	MJ	1,28E+02	8,22E+00	1,12E+01	0,00E+00	4,01E+00	8,02E+00	0,00E+00	9,93E+00	4,60E+00	0,00E+00	1,38E+00	8,71E-01							
Secondary materials	kg	2,95E+00	3,82E-03	1,93E-01	0,00E+00	1,86E-03	3,72E-03	0,00E+00	7,81E-02	1,16E-03	0,00E+00	3,13E-02	1,83E-01							
Renew. secondary fuels	MJ	1,44E+01	4,83E-05	4,33E-01	0,00E+00	2,35E-05	4,71E-05	0,00E+00	6,54E-05	2,39E-05	0,00E+00	3,88E-07	-7,84E-06							
Non-ren. secondary fuels	MJ	9,11E+00	0,00E+00	2,73E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00											
Use of net fresh water	m ³	2,73E-01	1,12E-03	1,16E-02	0,00E+00	5,46E-04	1,09E-03	0,00E+00	5,36E-03	4,79E-03	0,00E+00	1,15E-03	1,25E-03							

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
Hazardous waste	kg	4,47E-01	1,20E-02	1,52E-02	0,00E+00	5,83E-03	1,17E-02	0,00E+00	2,46E-01	5,08E-03	0,00E+00	7,28E-03	3,06E-02							
Non-hazardous waste	kg	4,72E+01	2,52E-01	1,57E+00	0,00E+00	1,23E-01	2,46E-01	0,00E+00	2,34E+00	1,16E-01	0,00E+00	7,62E-02	3,66E-02							
Radioactive waste	kg	1,28E-04	2,64E-06	2,23E-04	0,00E+00	1,29E-06	2,57E-06	0,00E+00	1,17E-05	7,05E-07	0,00E+00	8,79E-07	5,01E-06							

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
Components for re-use	kg	9,90E+00	0,00E+00	2,97E-01	0,00E+00															
Materials for recycling	kg	0,00E+00	0,00E+00	8,98E-01	0,00E+00	3,00E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00										
Materials for energy rec	kg	0,00E+00																		
Exported energy	MJ	0,00E+00																		
Exported energy – Electricity	MJ	0,00E+00																		
Exported energy –	MJ	0,00E+00																		

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
Global Warming Pot.	kg CO ₂ e	2,22E+01	5,81E-01	1,28E+00	-3,19E+00	0,00E+00	2,83E-01	5,66E-01	0,00E+00	9,25E-01	1,86E-01	0,00E+00	5,18E-02	-1,26E-02						
Ozone depletion Pot.	kg CFC-11e	4,35E-07	9,26E-09	1,40E-08	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,52E-09	9,03E-09	0,00E+00	4,48E-09	4,31E-09	0,00E+00	-1,67E-08	-1,71E-08
Acidification	kg SO ₂ e	1,13E-01	9,77E-04	6,81E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,76E-04	9,53E-04	0,00E+00	4,21E-03	9,84E-04	0,00E+00	2,29E-04	-7,58E-04
Eutrophication	kg PO ₄ ³ e	8,56E-02	2,47E-04	2,76E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,20E-04	2,41E-04	0,00E+00	6,19E-04	3,13E-04	0,00E+00	3,00E-05	-2,13E-04
POCP (“smog”)	kg C ₂ H ₄ e	1,97E-02	1,03E-04	7,70E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,04E-05	1,01E-04	0,00E+00	5,25E-04	9,30E-05	0,00E+00	1,31E-05	-5,91E-05
ADP-elements	kg Sbe	3,15E-05	1,90E-06	2,47E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,27E-07	1,85E-06	0,00E+00	1,85E-05	2,92E-07	0,00E+00	9,70E-08	-4,32E-07
ADP-fossil	MJ	2,17E+02	8,05E+00	1,41E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,92E+00	7,85E+00	0,00E+00	9,14E+00	4,56E+00	0,00E+00	5,03E-01	-2,96E-01

ENVIRONMENTAL IMPACTS – FRENCH NATIONAL COMPLEMENTS

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
ADP-elements	kg Sbe	2,97E-05	1,90E-06	1,12E-06	0,00E+00	9,27E-07	1,85E-06	0,00E+00	1,85E-05	2,92E-07	0,00E+00	9,72E-08	-4,32E-07							
Hazardous waste disposed	kg	4,46E-01	1,20E-02	1,52E-02	0,00E+00	5,83E-03	1,17E-02	0,00E+00	2,46E-01	5,08E-03	0,00E+00	7,28E-03	3,06E-02							
Non-haz. waste disposed	kg	4,71E+01	2,52E-01	1,49E+00	0,00E+00	1,23E-01	2,46E-01	0,00E+00	2,34E+00	1,16E-01	0,00E+00	7,62E-02	3,66E-02							
Air pollution	m ³	3,15E+03	1,05E+02	1,07E+02	0,00E+00	5,12E+01	1,02E+02	0,00E+00	4,76E+02	4,28E+01	0,00E+00	2,86E+01	-2,65E+0							
Water pollution	m ³	1,05E+02	4,55E+00	3,76E+00	0,00E+00	2,22E+00	4,44E+00	0,00E+00	2,93E+00	2,34E+00	0,00E+00	1,15E-01	3,01E-01							

ENVIRONMENTAL IMPACTS – GWP-GHG

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
GWP-GHG ⁹⁾	kg CO ₂ e	2,22E+01	5,85E-01	1,31E+00	-3,19E+00	0,00E+00	2,85E-01	5,70E-01	0,00E+00	9,30E-01	1,88E-01	0,00E+00	5,18E-02	-1,31E-02						

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013). In addition, the characterization factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated in line with the guidance of IES PCR 1.2.5 Annex 1. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

ENVIRONMENTAL IMPACTS – BEPALINGSMETHODE, NETHERLANDS

Impact category	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2/1	C2/2	C3/1	C3/2	C4/1	C4/2	D/1	D/2
Shadow price	€	3,17E+00	6,60E-02	1,04E-01	-1,60E-01	0,00E+00	3,22E-02	6,44E-02	0,00E+00	2,86E-01	2,83E-02	0,00E+00	1,11E-02	-2,35E-04						
Terrestrial ecotoxicity	DCB eq	5,87E-02	1,97E-03	2,01E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,63E-04	1,93E-03	0,00E+00	6,51E-03	6,65E-04	0,00E+00	7,17E-04	5,51E-04
Seawater ecotoxicity	DCB eq	2,74E+03	7,67E+01	9,40E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,74E+01	7,48E+01	0,00E+00	3,59E+02	2,87E+01	0,00E+00	3,88E+01	3,33E+01
Freshwater ecotoxicity	DCB eq	1,17E-01	6,89E-03	4,32E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,36E-03	6,72E-03	0,00E+00	9,65E-02	2,28E-03	0,00E+00	1,22E-03	4,87E-03
Human ecotoxicity	DCB eq	5,69E+00	2,45E-01	2,02E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,19E-01	2,39E-01	0,00E+00	1,96E+00	9,70E-02	0,00E+00	3,64E-02	2,19E-02
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ETE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ADP Fossil Fuels	kg Sbe	1,04E-01	3,87E-03	7,09E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,89E-03	3,77E-03	0,00E+00	4,40E-03	2,19E-03	0,00E+00	2,42E-04	-1,42E-04

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? [Read more online](#)

This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited
18.07.2025

