


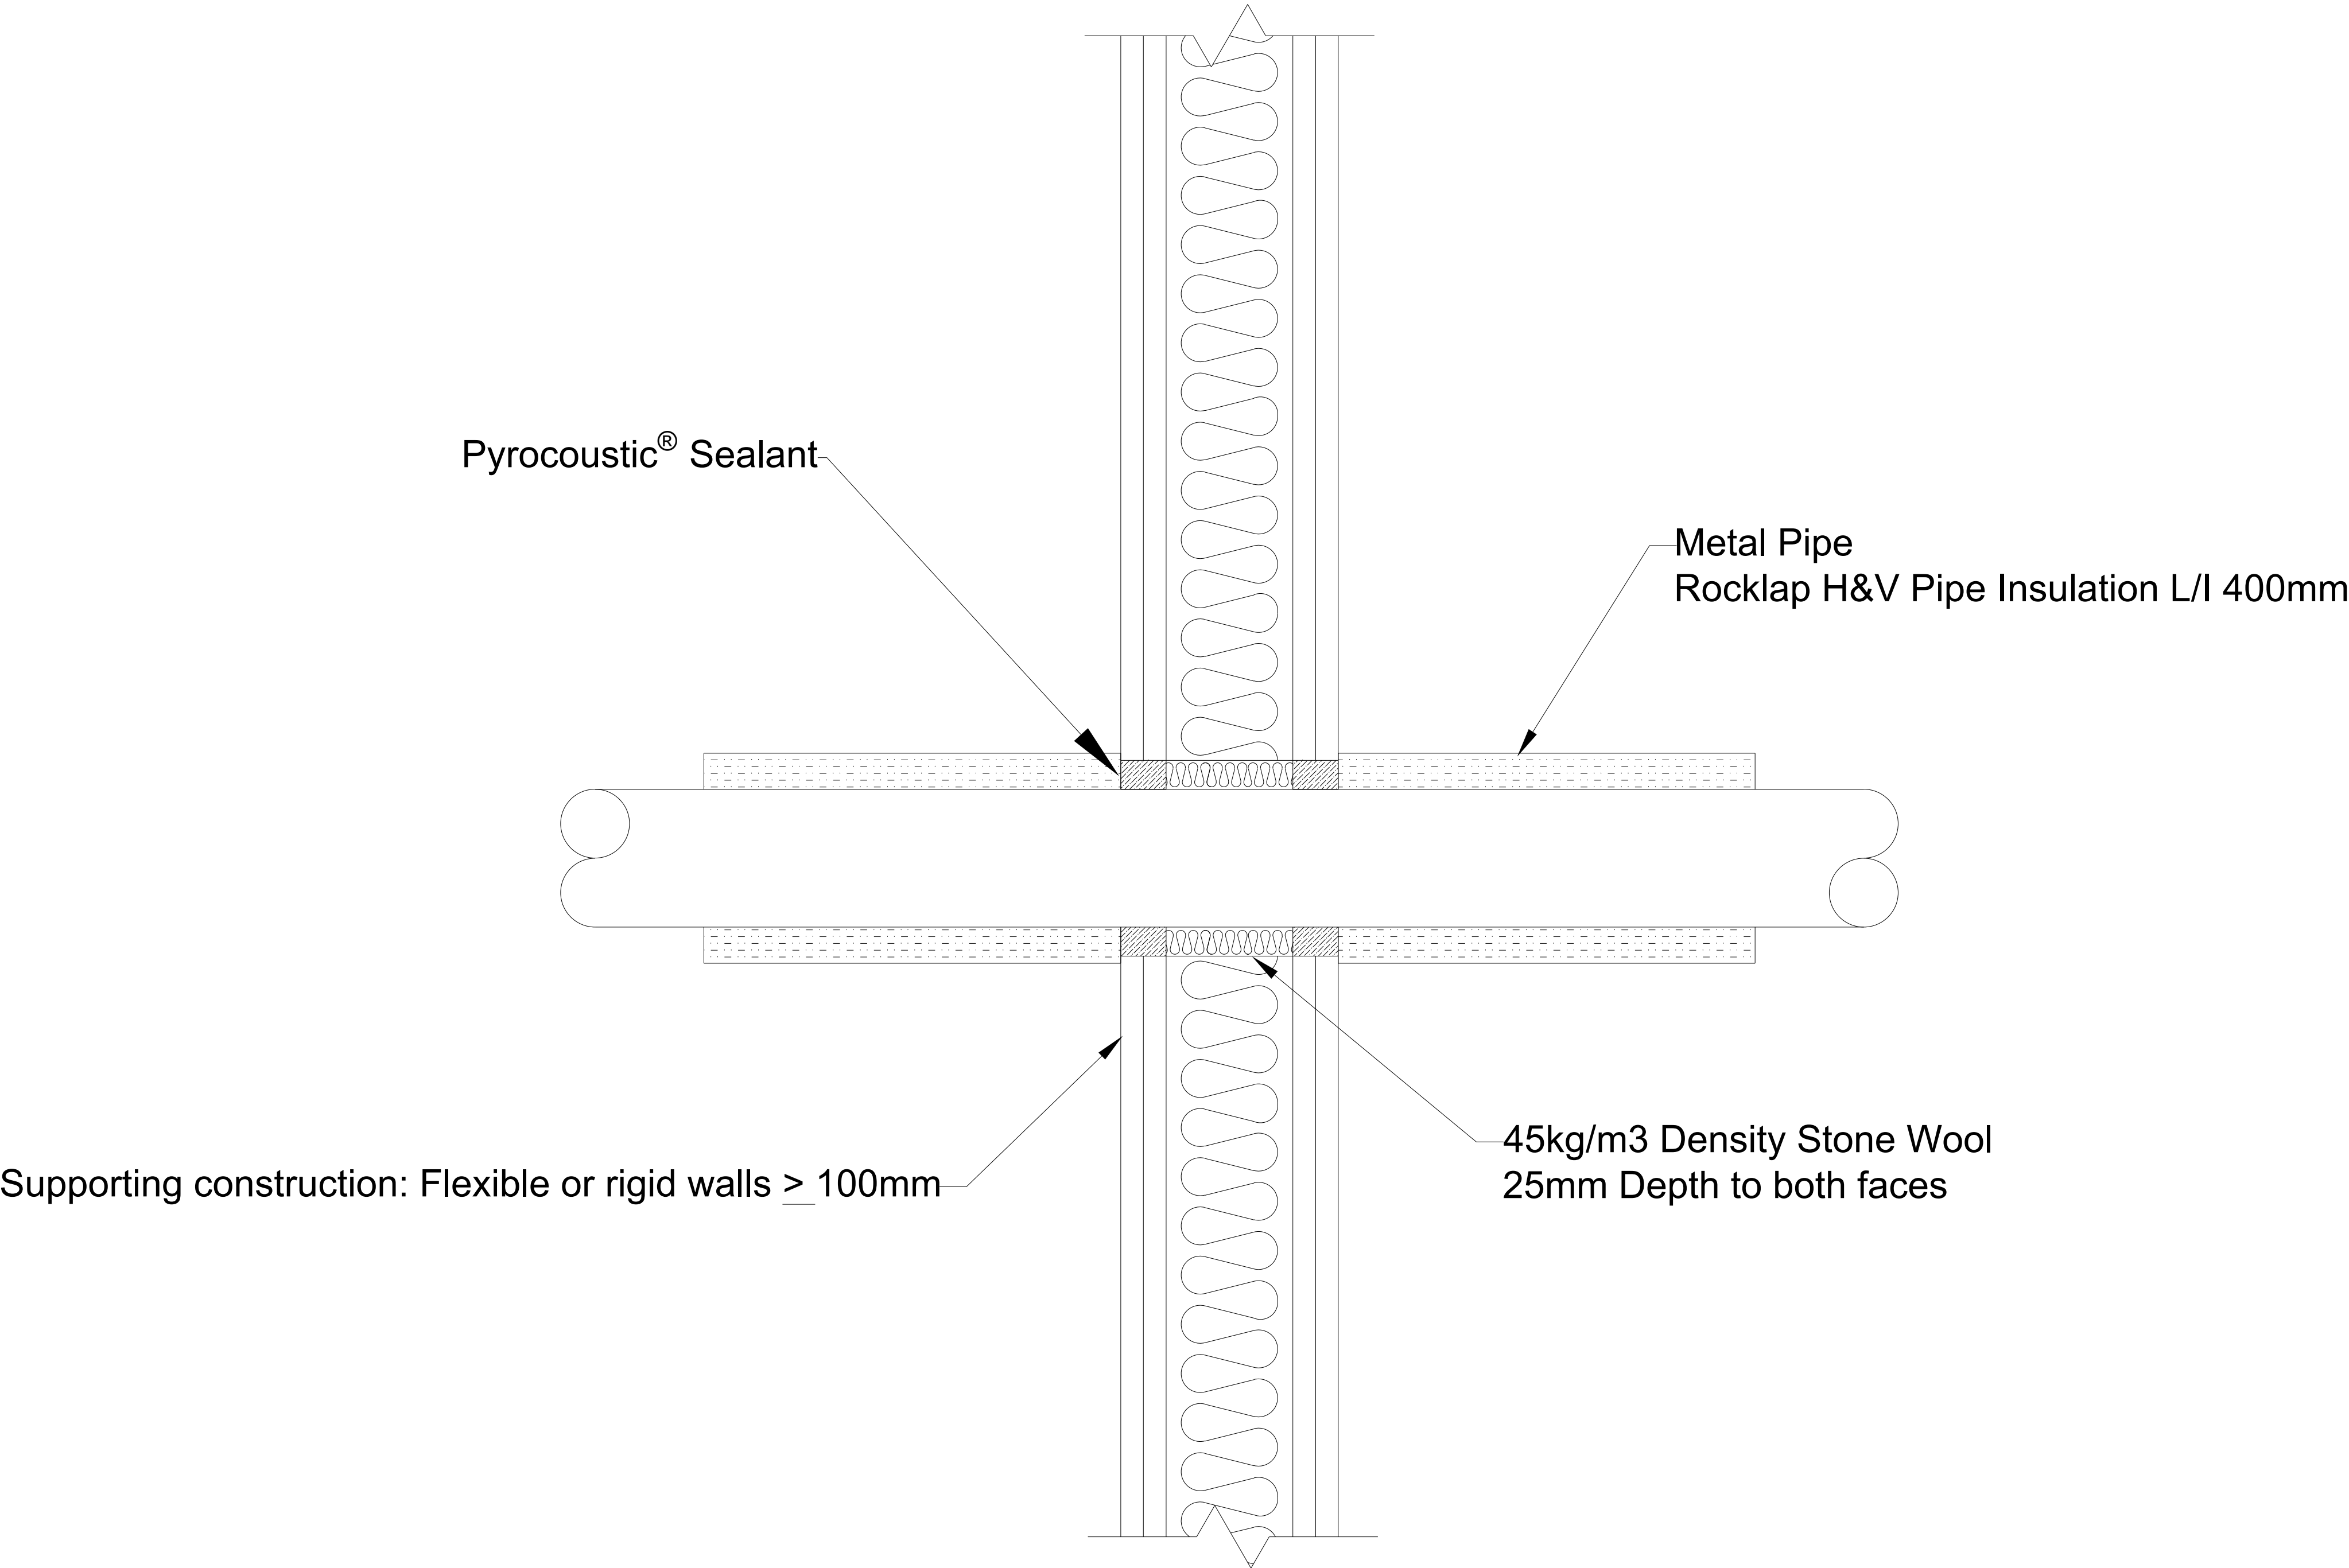

FSi Ltd. products are manufactured to rigid standards of quality. No liability can be accepted for the information provided in this document although it is published in good faith and believed to be correct at time of issue. Any drawings provided are for illustrative purposes only. FSi Ltd. reserves the right to alter product specifications without prior notice, in line with our Company policy of continuous development and improvement. Changes due to new findings are possible, errors and misprints are not excluded. No liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given. FSi Ltd. have no control over the methods of installation, competence of operatives or suitability of site condition. No warranties, expressed or implied, are intended to be given as to the actual performance of the product/system mentioned within this document.

Technical Details

Supporting Test Data:

-

549571/R

Test Standard:

-

EN1366-3:2021

Fire Resistance Performance:

<54mm Copper Pipe, >1.5mm WT, >20mm Rocklap H&V Insulation L/I, C/I	E 120 , EI 90 C/C
<76mm Copper Pipe, >1.5mm WT, >20mm Rocklap H&V Insulation L/I, C/I	E 120 EI 45 C/C

Supporting Construction:

Flexible walls ≥ 100mm - Insulated - 2x 12.5mm Plasterboard to each side
**The supporting construction must meet the fire resistance requirement of the proposed firestopping detail. Supporting construction must be installed and apertures formed in line with manufacturer's guidance*

Service Supports:

<400mm

**Service supports must be appropriately fire resistant*

Installation:

FSi Ltd. recommend installation of FSi Ltd. products is carried out by 3rd party certified installers.

The substrate must be clean, dry, sound and homogeneous, free from oils, grease, dust and loose particles.

The void depth should be such as to provide a minimum sealant depth required as per tested systems.The sealant should be gunned firmly into the aperture ensuring that it is in full contact with the substrate and service where applicable. Failure to carry this out may result in poor adhesion of the sealant and ultimate failure of the system.Tooling of the sealant may be necessary to achieve an acceptable appearance. This is accomplished by drawing a flat tool over the surface of the sealant to produce a smooth neat finish. Tooling also compresses the sealant into the aperture enhancing the adhesion to the substrate and service where applicable.

Penetration Service Details:

See 'Fire resistance performance' above

Minimum Separation Between Penetration Services:

100mm

Maximum Opening Size:

54mm Service - Annular Void 10mm
76mm Service - Annular Void 10 - 46mm

Issue No.	Drawing Reference	Date
1	PYROC-023	09/07/2025

STANDARD DETAIL

Drawing Title: Pyrocoustic system for insulated metallic penetrations through flexible or rigid walls >100mm

Scale : NTS

Drawn by : FSi Limited

Reviewed by : N/A

FSi Limited
Westminster Industrial Estate
Tamworth Road
Measham
Leicestershire
DE12 7DS

FSi

Promat